


Multi-service and Multi-tenant Application Delivery Controller Platform

XPoint VNF Manager allows customers to deploy ADC as Virtual Function through single-pane-of-management platform. XPoint VNF Manager makes it possible to seamlessly design feature rich managed load balancing services with agility and capacity on-demand.

The VNF-Manager-96 is a 2RU appliance with 40Gbps throughput that supports 96 tenants.

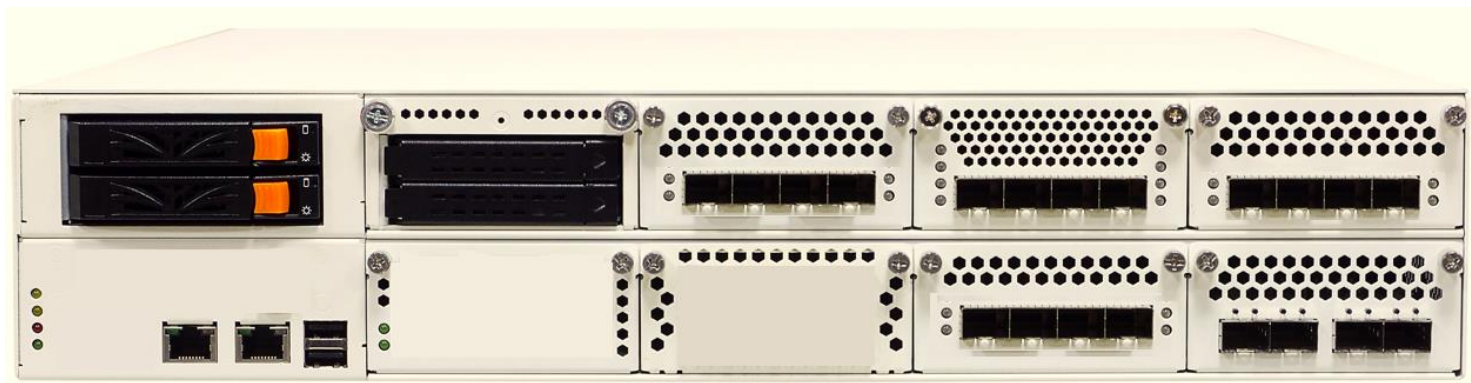

Hardware Platform Specification

Performance	
Throughput (L4/L7)	42Gbps/40Gbps
SSL TPS (1K/2K Keys)	70,000/35,000
Concurrent Connections	40,000,000
Maximum Tenants	96
Network Interface	
Gigabit Copper	2
10GE Fiber	16
25GE Port(SFP28)	Optional
Hardware Specification	
Processor	Intel 24 Cores
Memory (ECC RAM)	512GB
Storage	2TB SSD
Dimensions(W x D x H)	500mm(W) x 600 mm(D) x 88mm(H)
Rack Units (Mountable)	2U
Unit Weight	20 kgs
Power Supply	2U 500W Redundant Power Supply
Heat in BTU/hour	3,000
Operating Ranges	Temperature 0° - 40° C Humidity 10% - 85%